

STORM DOOR STANDARD

A) COLOR SELECTION:

- 1) Approved colors (See: **Siding Colors, S/4**) and white are permitted

B) REQUIREMENTS:

- 1) Must be one solid (uniform) approved color.
- 2) Two-tone or contrasting finish or detailing is not permitted.
- 3) Handles and Hinges may match Trim color, Storm Door color; or be Black or Brass.
- 4) There shall be no decorative ornamentation; i.e. medallions, silhouettes, etc. Non decorative name-plates are permissible.

C) APPROVED STYLES:


- 1) Upper 1/2, 2/3 or 3/4 solid glass/screen panel (see drawing "A").
- 2) Upper 1/2, 2/3 or 3/4 jalousie/screen panel (see drawing "B").
- 3) Full solid glass/screen panel (see drawing "C").

D) TRIM REQUIREMENTS:

All exterior wood components must be covered with aluminum cladding/capping, which cannot be seamed or pieced in the vertical or horizontal runs. The target coil stock color is "Royal Brown" for brown trim units and "Certainteed Charcoal Gray" for gray trim units.

Storm Door standards apply to the front entry's of Townhouse and Detached Units and to both the front and rear entry's of Split Level Townhouse

Linear Border & Divided Lite (Pane) etching is permitted for glass panel.

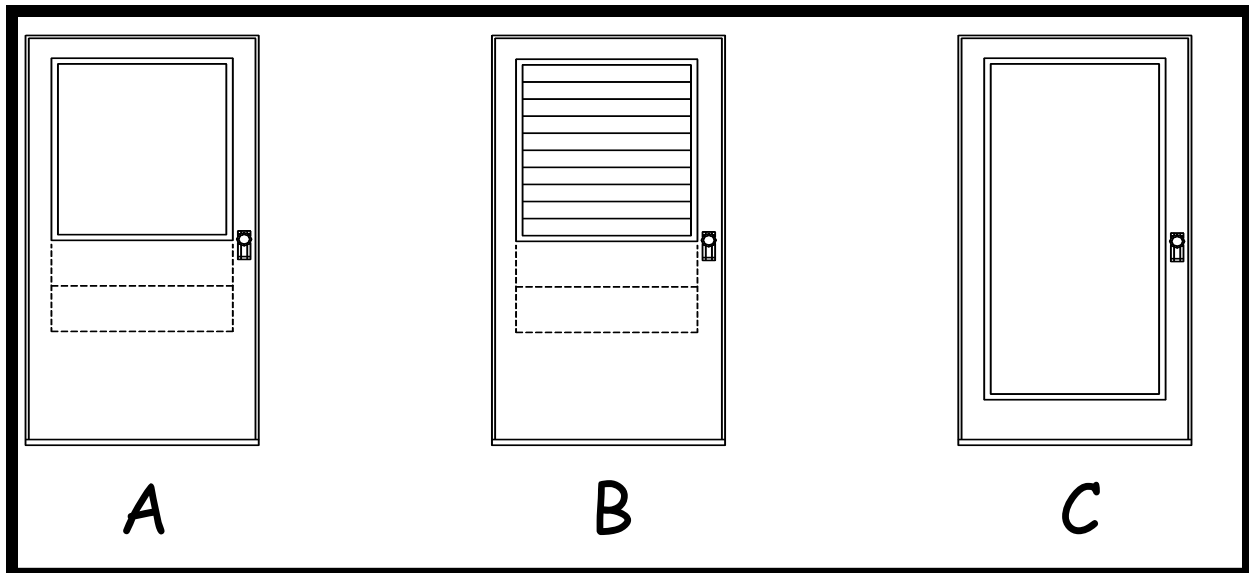

ARCHITECTURAL CONTROL STANDARDS

For
TWIN RIVERS COMMUNITY TRUST
92 Twin Rivers Drive West
East Windsor, NJ 08520

**STORM
DOOR**

**S
1b**